

PICTURE | PERFECT


32" hi-definition LCDTV with 3 HDMI, RJ-12 display control connector
(Pro:Idiom / MPEG4 option)

model no.


H32DLC



Motion Adaptive De-interlacing

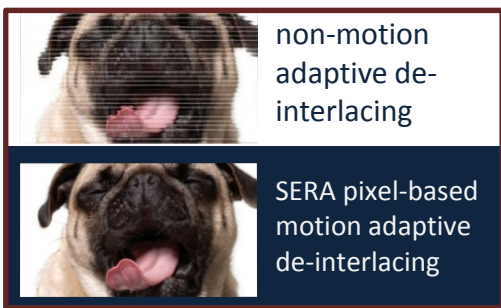

DiVa Picture Processing

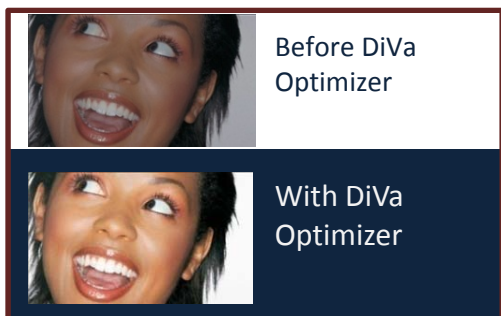

DiVa Picture Processing is for Rich Color Optimization

Hotel TV Features

Pro:Idiom™ Hotel TV with MPEG-4(H.264)

Startup Volume/Maximum Volume Settings

Startup Source and Channel

Source Labeling including DVD, Blu-ray, MP3/4 and Other Common Hotel Electronic Devices

8-Character Channel Labeling

Universal Group Code

USB 2.0 Media for Music/Photos and Cloning

60° Swivel Base and Lockable Base Plate

Selectable Timer (on/off schedule)

Front Panel Lockout

Pro:Idiom/MPEG4 Backpack (optional)



Add the PM4SBB Setback box for MPEG2/MPEG4 Free to guest and VOD support. Currently supporting Cox, Comcast, DirecTV, Dish Networks, World Cinema, and nStreams*.

Pro:Idiom **HDMI** **MPEG4**
CONTENT SECURITY HIGH-DEFINITION MULTIMEDIA INTERFACE

Advanced Digital Features

This 32" Deep-Black Cabinet design features the advanced MTK5380 processor with integrated ATSC and Clear QAM cable support (up to 1080p). 3D Comb Filter. ATSC PSIP compliant for on-screen digital broadcast guide. 3 HDMI connectors.

DiVa Picture Processing and BBE Sound

DiVa Picture Processing for a richly colored, crisp picture, and motion adaptive de-interlacer is capable of de-interlacing even the most complex images without loss in quality or smoothing. Clear dual 8 watt RMS stereo speakers, auto-volume and smooth volume controls. Digital audio output (Coaxial).

**inquiries welcome on other supported FTG and VOD systems*

PICTURE | PERFECT

32" hi-definition LCDTV with 3 HDMI, RJ-12 display control connector
(Pro:Idiom / MPEG4 option)

CONTENT SECURITY

model no.

H32DLC

Display Features		
Panel Maker	CMO*	
Panel Model number	V315B1-L01*	
Display type	TFT LCD	
Display interface (TTL, LVDS..etc)	LVDS	
Screen Size	32 inch	
Active Area	697.6845(H) X392.256(V)	
Aspect Ratio	16:9	
Panel Resolution	1366 X 768	
Brightness	500 cd/m2*	
Contrast ratio	1500:1*	
Viewing Angle	176(H) X 176(V)	
Dot Pitch	0.17025(H) X 0.51075(V)	
Maximum Color	16.7M	
Response time Gray-Gray (r&d)	6.5ms*	
Backlight life	50000 hrs	
Electronics		
Scaler Manufacture	MTK	
Scaler Model #	MTK5380	
Video Decoder Manufacture	MTK	
Video Decoder Model #	MTK5380	
TV Tuner Maker	SAMSUNG	
TV Tuner Model #	DTVS205ER201A	
MPEG Chipset	MTK5380	
Digital Comb Filter / Type	2D/3D	
TV Reception		
TV System	ATSC (MPEG2)/NTSC M	
Channel CATV - UHF/VHF	181 channel	
Antenna Impedance	75 ohm	
Connector type	F	
Audio		
Maximum Audio Output	2*8 W	
Total number of speakers	2	
Audio Surround	YES	
Video Connections		Quantity
Analog&Digital TV Tuner	1	
Composite Video Input	2 Rear + 1 Side	
Component Input (Y,Pb,Pr)	2	
VGA Input (15 pin D-Sub)	1	
HDMI Input	3	
Video Standards Supported		
Composite Video input	PAL/NTSC	
S-Video Input	PAL/NTSC	
RF	ATSC/NTSC M	
Audio Connections		Quantity
Stereo Mini Phono Jack Input (3.5mm)	1	
Earphone Jack	1 Rear	
RCA Input (Red, White)	2 Rear + 1 Side	
Coax Digital Output	YES(optional)	

VGA Resolutions Supported	
640x480 @ 60Hz	
800x600 @ 60Hz	
1024x768 @ 60Hz	
1280X1024 @ 60Hz	
1600X1200 @ 60Hz	
Features	
USB 2.0 for Photos/Music/Movies and Cloning	
Built in 3D De-interlace	
Picture enhancements with DiVa Picture Processing	
V-CHIP/CCD	
Over-The-Air ATSC/NTSC RF Input Support	
Clear-QAM Digital Cable Support	
Digital/Analog Channel auto tuning	
Banner Information of Current Virtual Channel	
Favorite Channel Edition Support	
LTI, CTI, Gamma Correction, Brightness, Contrast,	
HD compatible :480I,576I,480P,576P,720P,1080I, 1080P	
OSD Language :English/French/Spanish	
Accessories in the box	
AC Power cord	
Remote control	
Battery for remote	
Owners Manual	
AV cable	
Power Requirements	
Power Source	100-240VAC 50/60HZ
Unit input power	
Unit input power connector size	
Power ON consumption	< 200W
Standby consumption	
Dimension (WxHxD)	
Unit W/stand W/speakers	31.3x10.62x22.8 inch (lxdxh)
Unit W/O stand W/Speakers	31.3x4.4x20.8 inch (lxdxh)
Unit W/O Stand/Speakers	
Giftbox	36x12x27 inch (lxdxh)
Master Carton	
Weight (N.W.) and Environments	
Net weight (+stand ,+speakers)	31lbs
Gross weight (+std,+spk,+gftbx)	40lbs
Operating Temperature	0°C-40°C
Storage Temperature	-10°C-+60°C
Warranty	
Hospitality	2 Year Full Replacement
VESA Mount	
26 inch Model	400 x 200
32 inch Model	400 x 200
42 inch Model	400 x 200

Due to panel availability, specification items marked with (*) can change to comparable panel models.